




Insulation pallet, stackable

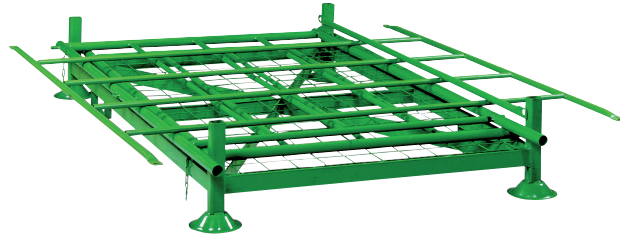

Technical details

Loading capacity 500 kg per pallet.

Load dependent on the desired usable height.

Stackable to a maximum of 3 high (for a usable height of 2200 mm)
or 4 high (for a usable height of 1600 mm).

FEIL standard insulation pallets.







FEIL standard textile rolling bases.




Textile rolling base, collapsible

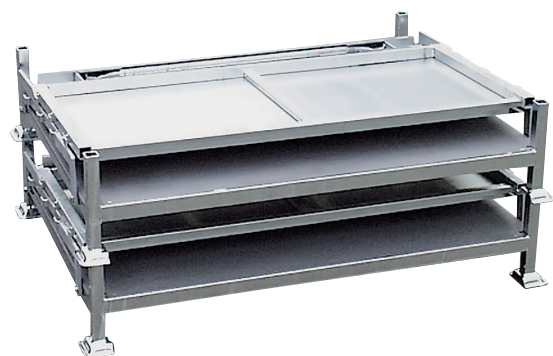

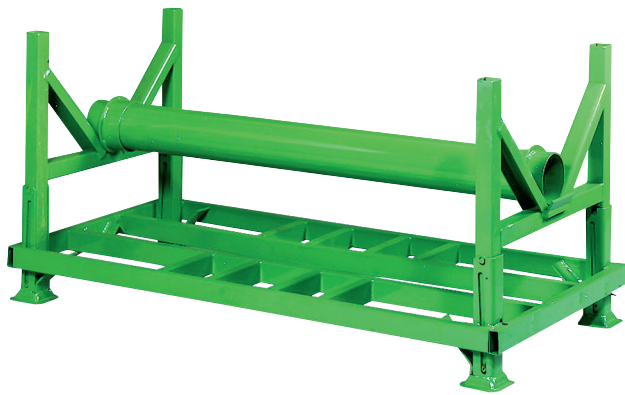


*Film roll frame
hanging roll storage*

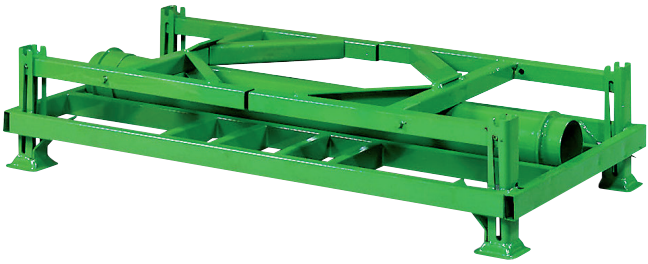

*Film roll frame, collapsible,
stackable, rigid and nestable models also available*

FEIL film roll frame special load carriers.



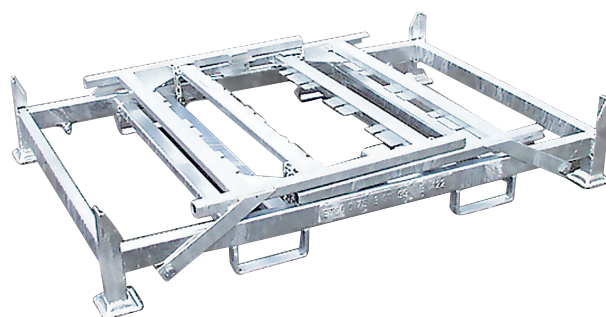

Film roll frame, collapsible, for multiple rolls, individually adjustable



Horizontal in plane storage or sheet metal prism

FEIL film roll frame special load carriers.




Film roll frame, collapsible





Braked or unbraked unwinding device, adapted to suit customer requirements

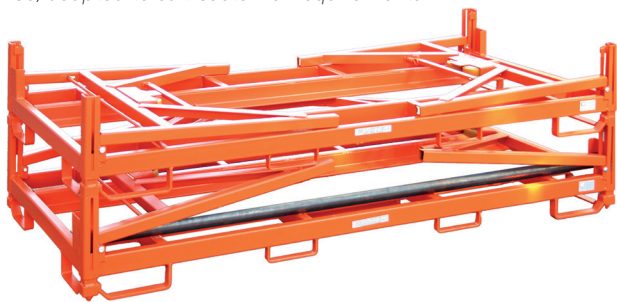

Rolling frame, collapsible

