

rolldolly®




For further information
about the rolldolly® please
visit our website
www.feil.eu




rolldolly®

The name is to the point. Rolldolly® stands for quality, durability and need-based configuration. The diversity of variants offers a huge product range. Use the advantages of the particular rolldolly made of plastic, aluminium, steel or stainless steel.

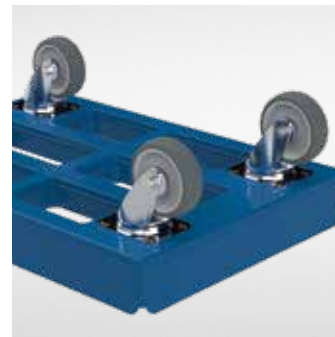

LOGISTIC
SOLUTIONS
for special
DEMANDS

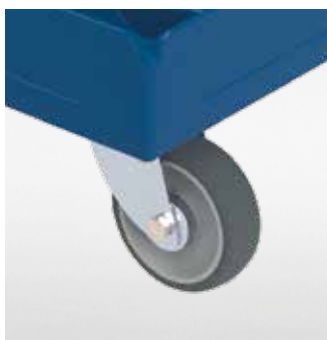

huge
range of
WHEELS AND
CASTORS
162



IDEAL FOR
EURONORM BOX
600 X 400 MM



rollidolly® LIGHT
VERSION CLOSED



rollidolly® LIGHT
VERSION OPEN



rollidolly® LIGHT VERSION GRID

 415 x 615 x 175 mm
  250 kg
  plastic

rollidolly® LIGHT

- plastic bottom made of high-quality ABS-material
- with four bolt hole swivel castors, ø 100 mm, wheel center / tread: polypropylene / thermopl. rubber
- assembling of the castors with bolt hole: one screw per castor
- other castors possible on request
- standard colours available in traffic red similar to RAL 3020, and traffic blue similar to RAL 5017
- other RAL-colours possible on request

rollidolly® LIGHT		
	 415 x 615 x 175 mm	 405 x 605 x 20 mm
	traffic red similar to RAL 3020	traffic blue similar to RAL 5017
version open	M410610ABS3020OBLB7	M410610ABS5017OBLB7
version grid	M410610ABS3020RBLB7	M410610ABS5017RBLB7
version closed	M410610ABS3020GBLB7	M410610ABS5017GBLB7



IDEAL FOR
REUSABLE CONTAINERS
600 X 400 MM

rollidolly®

rollidolly® CLASSIC OPEN VERSION



rollidolly® FAVORIT
WELDED VERSION



ADAPTER FRAME FOR TRAPEZOID
REUSEABLE CONTAINERS



410 x 610 x 190 mm



300 kg



plastic

rollidolly® CLASSIC & FAVORIT

- plastic bottom made of high-quality HDPE-material, version FAVORIT with closed subfloor outline
- ideal securing of the plastic boxes through double safety edge
- easy handling of the empties through build-in stacking holes
- with four swivel castors, $\varnothing$ 100 mm, wheel center / tread: polypropylene / thermopl. rubber
- assembling of the castors with plate: 4 screws per castor
- optionally available for trapezoid reusable containers: adapter frame made of 2 mm thick, galvanized sheet steel
- embossing of the front side and long side possible
- available in colours flame red similar to RAL 3000, gentian blue similar to RAL 5010, light blue similar to RAL 5012, telegrey similar to RAL 7046 and black similar to RAL 9005

rollidolly® CLASSIC/FAVORIT	
	410 x 610 x 190 mm 402 x 602 x 15 mm
CLASSIC	F92702PE 3000 OL029
FAVORIT	F92601PE 3000 OL029
adapter frame	ARTR400600CM
Handrail bracket for rollidolly® 400 x 600 mm	GSTH400KC001
handle bar	GSTS800KC001



- handle bar made of bent pipe $\varnothing$ 20 mm
- height handle bar ca. 800 mm
- adapter plate for screwing on and inserting the handle bar
- surface: galvanized blue, Cr 3

* The rollidolly® CLASSIC & FAVORIT is apart from the standard colour flame red, similar to RAL 3000, also available in the following colours: gentian blue similar to RAL 5010, light blue similar to RAL 5012, telegrey similar to RAL 7046 and black similar to RAL 9005. To generate the correct colour code, please replace the corresponding digits in the item number. (Ex.: in item number „F92702PE**3000**OL029“ „**3000**“ stands for flame red.).

rolldolly® XL

CLASSIC & FAVORIT

UP TO
500 KG LOAD CAPACITY



The rolldolly® XL is designed and optimized for the transport of Euronorm boxes. With up to 500 kg load capacity in an area of 600 x 800 mm it is one of the biggest in the sector. However, its potential is not yet exhausted with these features.



TECHNICAL HIGHLIGHTS

- plastic surface made of high-quality HDPE
- double stacking edge for optimal transport of boxes
- build-in stacking holes for safe and easy handling of empties
- drains ensure quick cleaning
- recessed grips ease the working with the rolldolly®
- The FAVORIT offers with its closed subfloor a HACCP conform logistic
- embossing possible on both front sides

rolldolly® XL CLASSIC & FAVORIT

 612 x 814 x 195 mm |  602 x 802 x 15 mm

PP / TPR castors, Ø 100 mm, 300 kg load capacity

E50O00PE25010OL025

PA / PU castors, Ø 125 mm, 500 kg load capacity

E50O00PE25010OL0G5

Handrail bracket for rolldolly® XL

GSTHS600KC001

handle bar

GSTS800KC001



The basic measurement is designed for the ideal utilization of the trucks loading space.

As a result of the excellent stacking, only very few space is needed on the truck for the return of the empty rolldolly XL.



The FAVORIT model has a closed subfloor outline and can be used in areas with high hygienic requirements.

TECHNICAL DATA


 612 x 814 x 195 mm

 300 / 500 kg

 plastic



Optionally, three rows of fixed castors can be fitted to the FAVORIT model. The middle row is positioned lower and serves as pivot point.

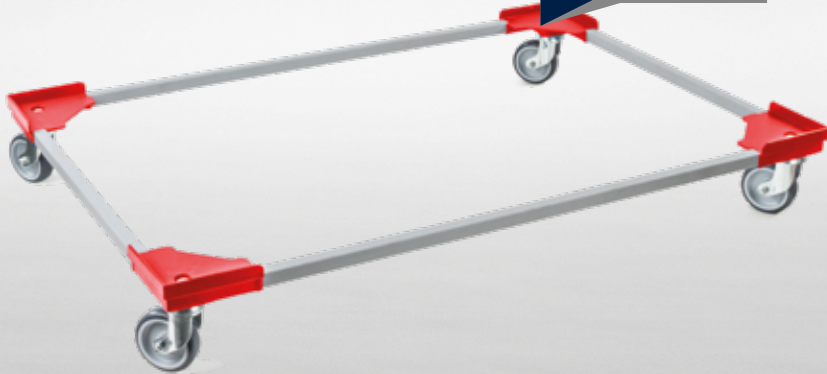

IDEAL FOR
2 EURONORM BOXES
 600 X 800 MM

rollidolly®

rollidolly® FLEX
810 x 1.210 MM



rollidolly® FLEX
310 x 410 MM



rollidolly® FLEX
610 x 410 MM

 300 kg
 steel / plastic

rollidolly® FLEX

- steel profile frame with four plastic corners, red
- with four bolt hole swivel castors, ø 100 mm, wheel center / tread: polypropylene / thermopl. rubber
- assembling of the castors with bolt hole: one screw per castor
- different special dimensions possible on request

	rollidolly® FLEX
 310 x 410 x 170 mm  305 x 405 x 20 mm	M310410S3020BLB7
 410 x 610 x 170 mm  405 x 605 x 20 mm	M410610S3020BLB7
 610 x 810 x 170 mm  605 x 805 x 20 mm	M610810S3020BLB7
 810 x 1.210 x 170 mm  805 x 1.205 x 20 mm	M8101210S3020BLB7



FUNCTIONAL HELPERS IN EVERY AREA



rolltainer®

nestainer®

Steel roll containers

Laundry containers

rolldolly®

Cargo systems

Special applications

Wheels and castors

Accessories



rolldolly®

416 X 618 MM
WITH TPR AND PP CASTORS



416 X 618 MM
WITH TPR AND PP CASTORS



IDEAL FOR
EURONORM BOXES



418 x 618 x 132 mm



150 kg



aluminium

rolldolly® ALU

- made of untreated aluminium-angle section
- with four swivel castors, $\varnothing$ 80 mm, wheel center / tread: polypropylene or polypropylene / thermopl. rubber
- assembling of the castors with bolt hole: one screw per castor
- all around safety edge, ideal for the transportation of Euronorm boxes

rolldolly® ALU



418 x 618 x 132 mm |  409 x 609 x 20 mm

ALU $\varnothing$ 80 polypropylene black

ATR420618031

ALU $\varnothing$ 80 polypropylene / thermopl. rubber grey


ATR420618033

NEW



rolldolly®

MODULAR SYSTEM

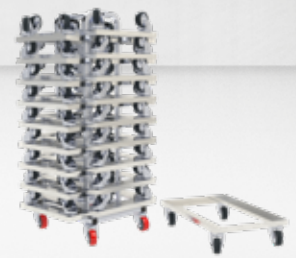

SAFE AND SPACE-SAVING
STORAGE



ALSO SUITABLE FOR
ROLLDOLLY LIGHT

30 418 x 618 x 132 mm

150 kg

steel

rolldolly® Tower ME 1035

- chassis made of 30 x 30 mm square tube
- with four swivel castors, ø 80 mm, wheel center / tread: polyamide / polyurethane
- tubular frame modular screwable onto the chassis, different usable heights available
- surface: galvanized blue, Cr 3

rolldolly® Tower ME 1035, 425 x 500 mm, Cr 3

rolldolly® Tower ME 1035

425 x 500 x 1.170 mm | 385 x 490 x 1.035 mm

TRT425500KC0184



**IDEAL FOR
EURONORM BOX
400 X 600 MM AND
600 X 800 MM**

400 X 600 MM

RUST-FREE

**600 X 800 MM AND
400 X 600 MM**

rolldolly®

300 kg **stainless steel**

rolldolly® STAINLESS STEEL

- welded stainless steel-frame, front sides made of section tube, long sides made of stainless steel sheet
- three wheels per long side
- six wheels, ø 125 mm, wheel center / tread: polyamide, stainless steel plain bearing, screwed stainless steel axis
- middle wheels are in a lower position, the rolldolly can be rotated on the spot and can easily be slid over an edge

rolldolly® STAINLESS STEEL		
410 x 655 x 170 mm 405 x 603 x 25 mm	ETR4106550H7	
615 x 862 x 172 mm 605 x 803 x 30 mm	ETR6158830H7	



 300 / 500 kg
  steel

rolldolly® STEEL

rolldolly® STEEL, 313 x 413 mm

- rolldolly® made of steel, surface powder coated gentian blue similar to RAL 5010
- with three swivel and one swivel castor with total brake, Ø 100 mm, wheel center / tread: polyamide / elastic
- assembling of the castors with plate

rolldolly® STEEL, 800 x 1.200 mm

- pallet frame made of steel, surface hot-dipped
- with two swivel and two swivel castors with total brake, Ø 125 mm, wheel center / tread: polypropylene
- assembling of the castors with plate

rolldolly® STEEL	
rolldolly® STEEL, 313 x 413 mm, 300 kg  313 x 413 x 168 mm  305 x 405 x 36 mm	STR41331350100I2
rolldolly® STEEL, 800 x 1.200 mm, 500 kg  810 x 1.210 x 213 mm  802 x 1.202 x 46 mm	MBR8221220F016



**THE RIGHT SIZE
FOR EVERY DEMAND**



600 X 300 MM
Ø 100 MM POLYPROPYLENE
CASTORS



800 X 600 MM
Ø 125 MM SOLID RUBBER
CASTORS



 200 kg - 1200 kg
  wood with non-slip coating

Furniture dolly

- wooden base made of multiplex plywood with full covering non-slip coating
- with four swivel castors, different diameter and treads possible

	furniture dolly	packing unit
600 x 300 mm, Ø 75 mm thermopl. rubber castors	MR60030075G	2 pieces
600 x 300 mm, Ø 100 mm solid rubber castors	MR600300100G	2 pieces
600 x 300 mm, Ø 100 mm polypropylene castors	MR600300100P	2 pieces
600 x 350 mm, Ø 100 mm solid rubber castors	MR600350100G	2 pieces
600 x 350 mm, Ø 100 mm polypropylene castors	MR600350100P	2 pieces
600 x 400 mm, Ø 125 mm solid rubber castors	MR600400125G	1 piece
600 x 600 mm, Ø 200 mm solid rubber castors	MR600600200G	1 piece
600 x 600 mm, Ø 125 mm polyurethane castors	MR600600125PU	1 piece
800 x 600 mm, Ø 125 mm solid rubber castors	MR800600125G	1 piece
480 x 720 mm, Ø 100 mm solid rubber castors	MR480720100GG	2 piece



Lid KU 600 x 800 mm

- HDPE-plastic in black similar to RAL 9005
- internal dimension: ca. 603 x 803 mm (w x l x h)
- external dimension: ca. 618 x 822 x 93 mm (w x l x h)
- max. stacking load: 2.000 kg

SPECIAL FEATURE

- two lashing straps integrated into the lid (2.000 mm strap length) for hooking onto rolldollys

lid KU black,
600 x 800 mm, 2 lashing straps

LL120035



Lid KU 800 x 1200 mm

- HDPE-plastic in black similar to RAL 9005
- internal dimension: ca. 803 x 1.203 mm (w x l x h)
- external dimension: ca. 810 x 1.210 x 100 mm (w x l x h)
- max. stacking load: 2.000 kg
- geeignet für 4x Euro-Kisten 400 x 600 mm oder 2x 600 x 800 mm, oder 1x 800 x 1.200 mm

SPECIAL FEATURE

- two lashing straps integrated into the lid (2.000 mm strap length) for hooking onto rolldollys

lid KU black,
800 x 1.200 mm, 2 lashing
straps

LL120696



lid for load securing
suitable for rolldolly® INDUSTRY
and adapter pallet INDUSTRY

NEW

STACKABLE

**OPTIONALLY AVAILABLE
WITH CATCH CORNER**

**OPTIONALLY
AVAILABLE**

CATCH CORNER
FOR
MOBILE FRAME
400 X 600 MM

IDEAL FOR EURONORM BOXES

rolldolly® INDUSTRY
MOBILE FRAME 400 X 600 MM

rolldolly® INDUSTRY chassis 400 x 600 mm

- chassis made of rectangular tube: 15 x 30 mm
- wheelbase: 317 x 400 mm (centre - centre wheel)
- loading surface and storage height: 142 mm
- with four bolt hole swivel castors, ø 100 mm, wheel center / tread: polypropylene
optionally: four bolt hole swivel castors, ø 100 mm, wheel center / tread: polyamide, electric conductive: max. 105 Ohm leakage resistance
- external dimensions: 400 x 600 x 157 mm (l x w x h)
- internal dimensions: 370 x 570 mm
- max. load capacity: 250 kg
- surface: steel parts galvanized blue, Cr 3

Catch corner for chassis 400 x 600 mm


- catch corner made of laser-cut sheet steel t = 2 mm, conically edged
- four holes ø 5.5 mm, including four blind rivets 5 x 12 mm
- surface: galvanized blue, Cr 3

	4 swivel castors ø 100 mm, PP white	4 swivel castors ø 100 mm, PA black, max. leakage resistance 105 Ohm
rolldolly® INDUSTRY	FR400600C0R7	FR400600C0R8
Catch Corner		FEK157402C


120

NEW


STABLE STORAGE- AND TRANSPORT SYSTEM

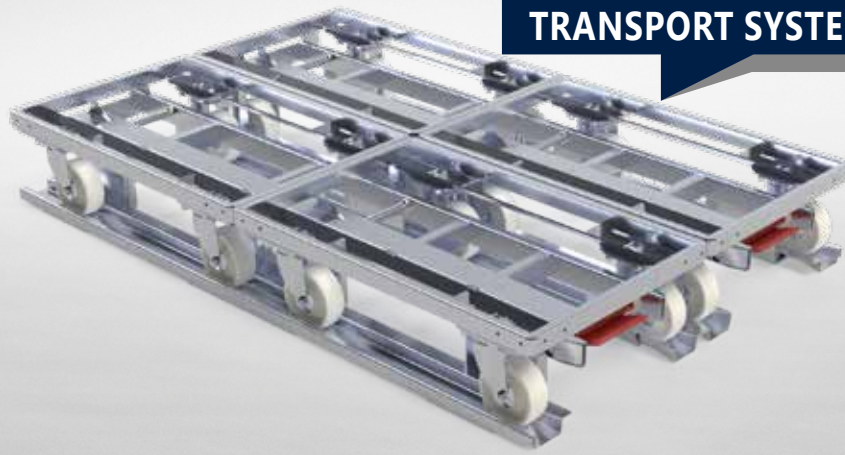

ADAPTER PALLET WITH
4 X rolldolly® INDUSTRY, 400 X 600 MM



ADAPTER PALLET
INDUSTRY 1200 X 800 MM



ADAPTER PALLET WITH
rolldolly® INDUSTRY

Adapter pallet INDUSTRY 1200 x 800 mm

- extreme stable storage and transport system for rolldolly® INDUSTRY, 400 x 600 mm, 600 x 800 mm, 800 x 1.200 mm
- intuitive locking system of the rolldolly® via one-foot operation
- the „space saver“ for storage and transport space
- europallet dimensions 1.200 x 800 mm
- stackable (15-times)
- optimal material flow management in combination of roller unit and forklift capability
- forklift pickup on short and long side
- electric conductive (ESD)

TECHNICAL DATA:

- external dimensions: 800 x 1.210 x 125 mm
- loading capacity:
 - > 4x rolldolly® INDUSTRY, 400 x 600 mm
 - > 2x rolldolly® INDUSTRY, 400 x 600 mm + 1x rolldolly® INDUSTRY, 600 x 800 mm
 - > 2x rolldolly® INDUSTRY, 600 x 800 mm
 - > 1x rolldolly® INDUSTRY, 800 x 1.200 mm
- self-weight: 32 kg
- load capacity: 1.000 kg
- surface: galvanized blue, Cr 3

adapter pallet INDUSTRY

APA8001200C001

NEW

IDEAL FOR
EUROPALLETS AND
EUROPALLET CAGES



CARRIER



CARRIER WITH
STACKING FRAME



CARRIER WITH
STACKING FRAME

Pallet carrier and stacking frame

- chassis made of sturdy welded angle steel construction 50 x 50 x 5 mm
- castors optionally with a tread made of TPR, polyamide, heavy-duty elastic or PULastic
- catching plates welded to all four corners for safe loading of the pallet carrier
- all chassis can be retrofitted with a stacking frame as well as a drawbar and coupling
- surface: hot-dipped

pallet carrier, 1.210 x 810 mm, hot-dipped |  1.260 x 860 x 350 mm

750 kg, TPR castors

FR8101210HD0P2

1.200 kg, polyamide castors

FR8101210HD0P4

1.200 kg, heavy duty elastic castors

FR8101210HD0I9

2.000 kg, polyurethane-elastic
castors (PULastic)

FR8101210HD0O6

stacking frame, 1.200 x 800 mm, hot-dipped |  1.260 x 860 x 200 mm

stacking frame, H=160 mm

AR8101210160HD

stacking frame, H=260 mm

AR8101210260HD


stacking frame, H=360 mm

AR8101210360HD

122

NEW

PALLET CARRIER CAN BE MOVED
IN A COMPOUND FOR A
**LIFTING AND FORKLIFT-FREE
PRODUCTION**

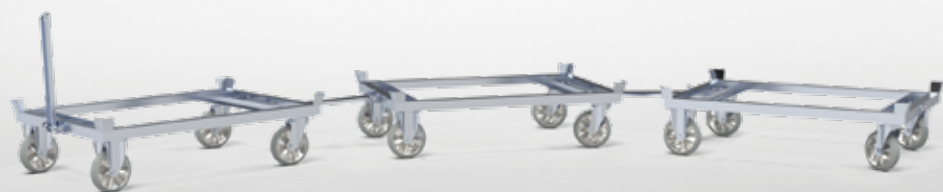

CARRIER IN A COMPOUND
TUGGER TRAIN



CARRIER WITH
PUSH HANDLE



CARRIER WITH DRAWBAR
AND COUPLING SYSTEM

Drawbar and coupling set and push handle for carriers


- spring-supported drawbar, length: 500 mm, eye $\varnothing$ 30 mm
- coupling mandrel made of shaft $\varnothing$ 25 mm with drill hole for safety pin (not included)
- comes standard with the drawbar mounted on the side of the swivel castors
- surface: hot-dipped

push handle for pallet carrier,
 $\varnothing$ 27 mm, screwable, hot-dipped

GSTK600805HD

drawbar and coupling set,
Cr 3, for steell roll containers
800 x 1.200 mm and 950 x 1.350 mm

FDSPFC

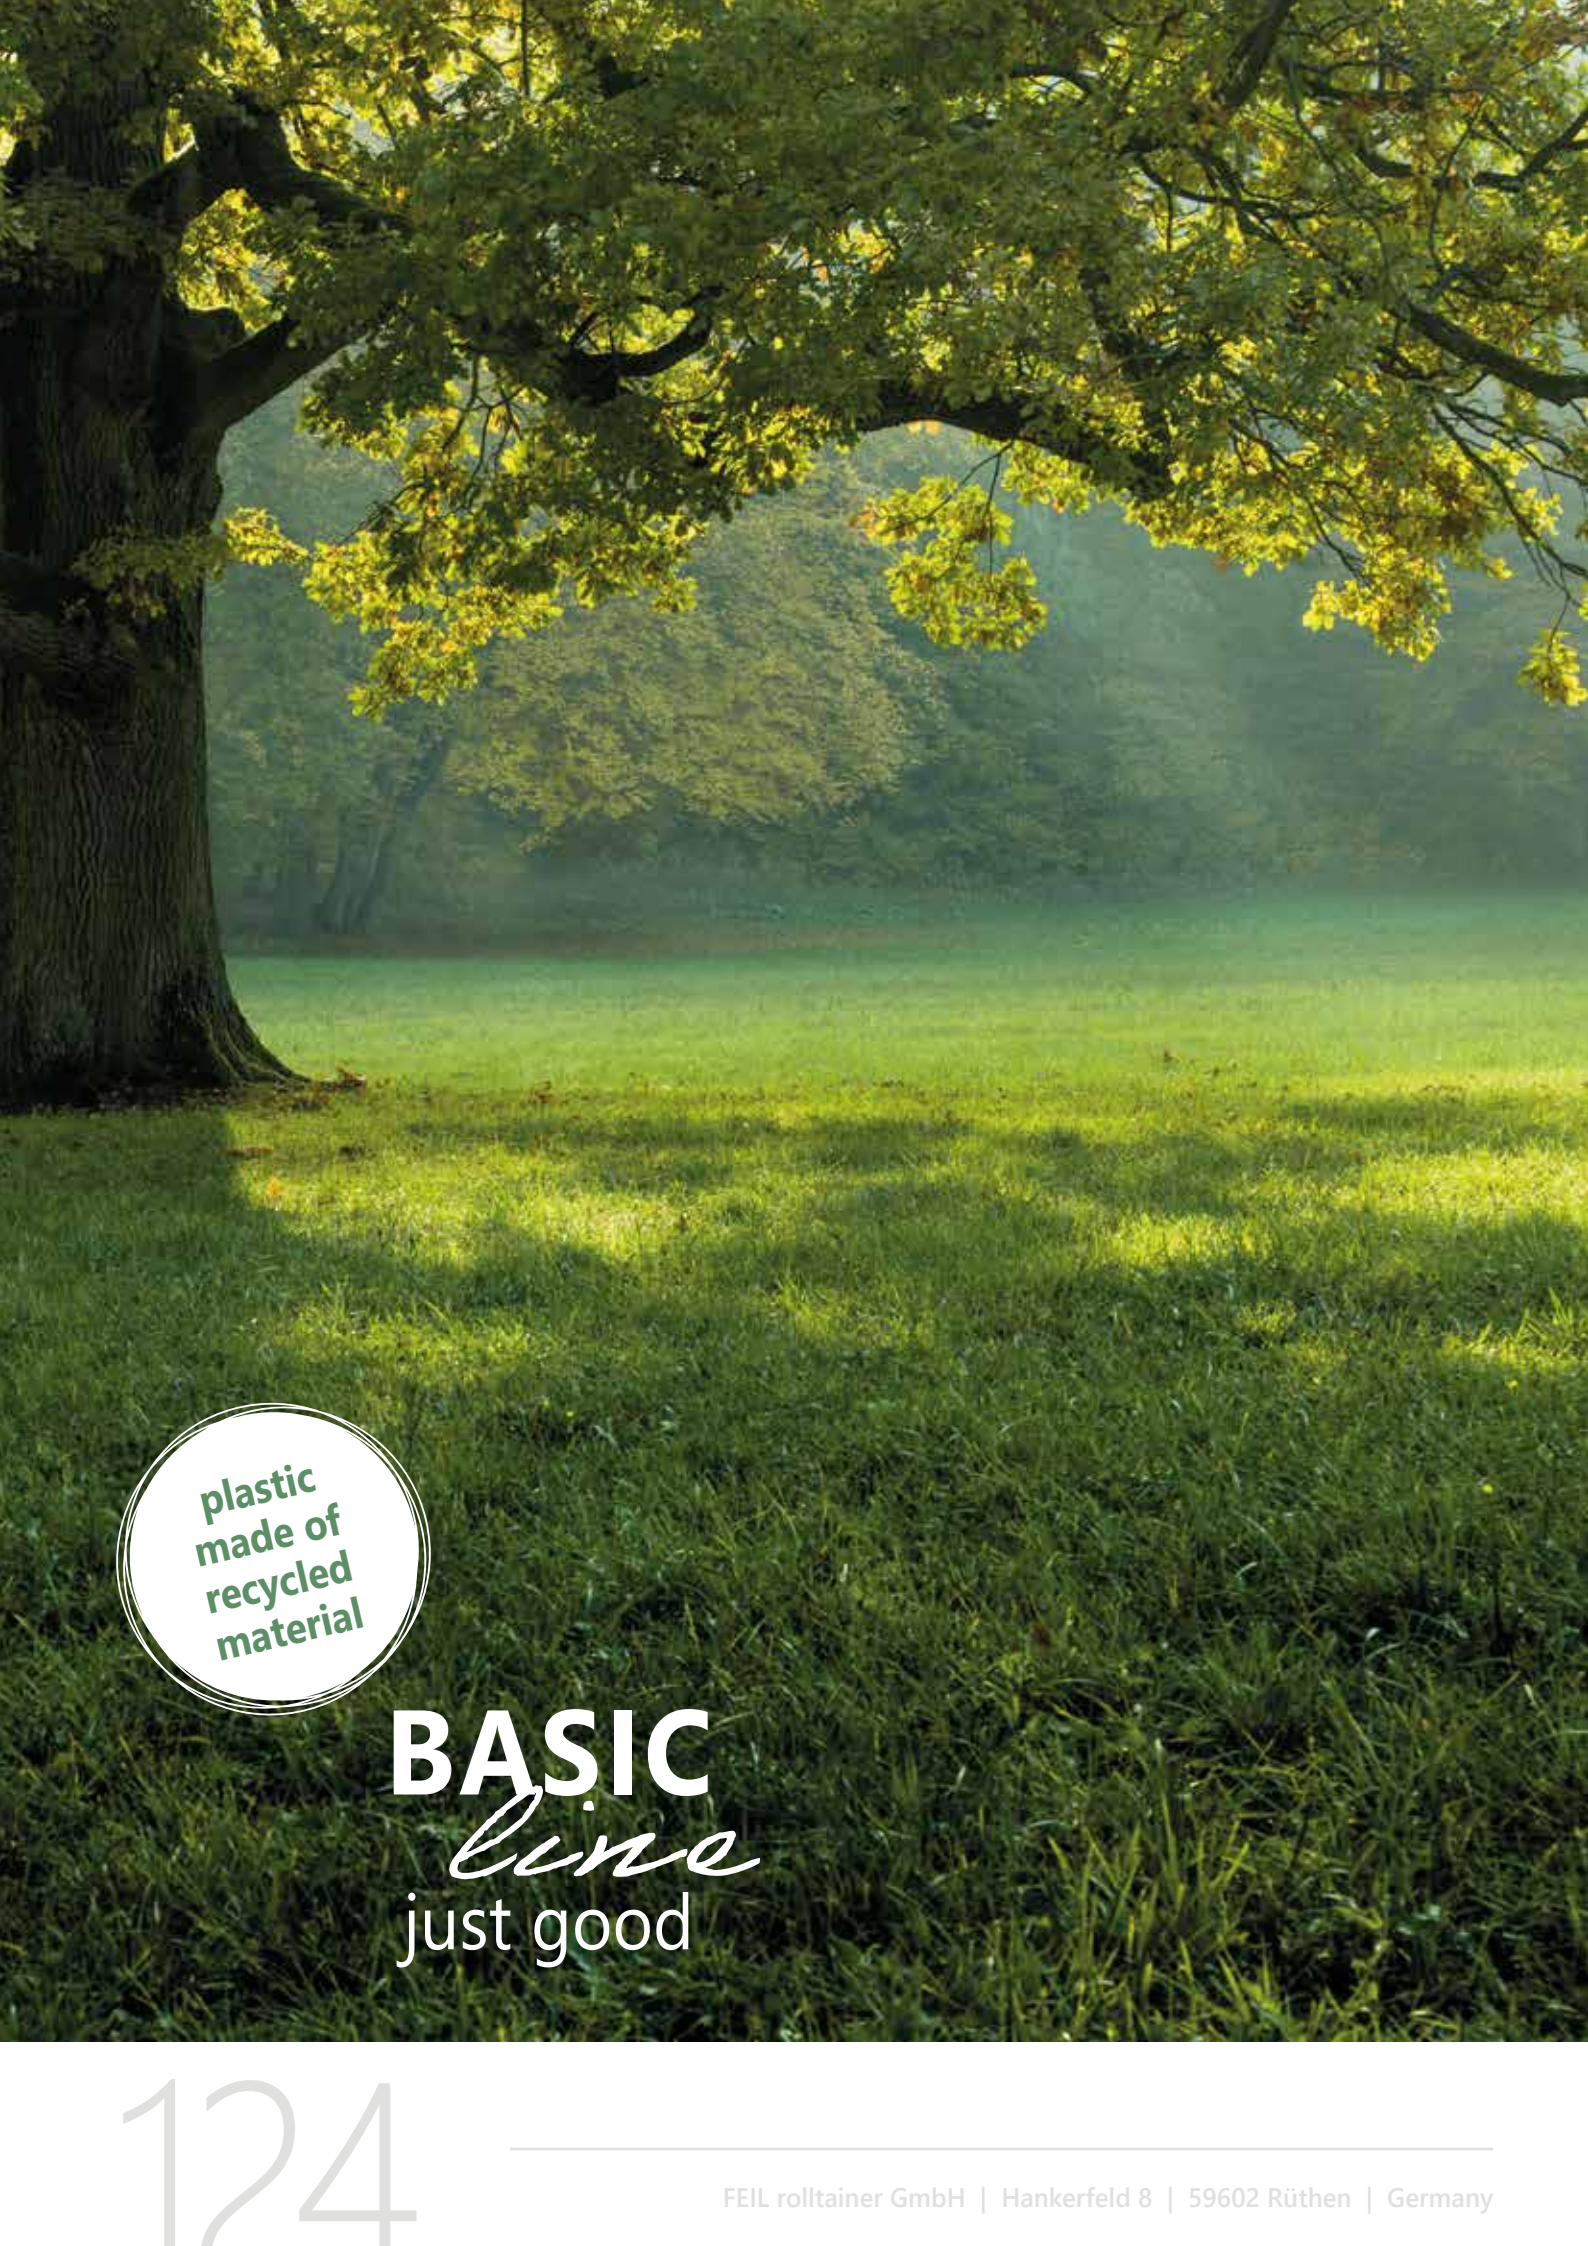

plastic
made of
recycled
material

BASIC
line
just good



rollidolly® BASIC

rollidolly® BASIC

- up to 300 kg load capacity
- external dimension: 610 x 410 x 190 mm
- internal dimension: 602 x 402 mm
- transportroller for Euronorm boxes 600 x 400 mm
- plastic base made of recycling material
- with four swivel castors, ø 100 mm, wheel center / tread: polypropylene / thermoplastic rubber
- ideal securing of the plastic boxes through double safety edge

rollidolly® XL BASIC

- up to 300 kg load capacity
- external dimension: 612 x 814 x 195 mm / interior: 602 x 804 mm
- plastic base made of recycling material
- with two swivel and two fixed castors ø 100 mm
wheel center: polypropylene
tread: thermoplastic rubber
- ideal securing of the plastic boxes through double safety edge

rollidolly® BASIC

F92702RC9005OL029

rollidolly® XL BASIC

E50O00RC29005OL025

**Want to see more
BASICline products?**

**You can find the right rolltainer®
and ADB on page 44-46.**